

VF Series Reach-In Freezers



PROJECT:

ITEM NUMBER:

MODEL NUMBER:

SPECIFICATIONS FOR: VF23-S AND VF49-S

- **Exterior Finish:** Exterior front sides and doors are stainless steel. Exterior top, bottom and back are galvanized steel.
- **Interior Finish:** Interior liner and interior door panel are stainless steel.
- **Insulation:** Complete cabinet and door(s) are foamed-in-place with polyurethane foam insulation.
- **Hardware:** Heavy duty, pivot hinges; key locks; recessed pocket handle(s); self adjusting magnetic gaskets; 4" dia. casters. (2) vinyl coated shelves per door section standard.
- **Electrical:** All models are standard with complete perimeter, anti-condensate door frame heater wires. An incandescent light is activated by a switch for each door.
- **Instrumentation:** Microprocessor with digital display allows temperature adjustment at control panel.
- **Refrigeration:** Complete bottom mounted refrigeration system with a copper tube, ceiling mount aluminum fin evaporator. The condensate is collected and automatically evaporated from an energy efficient air over wick style vaporizer. Drain line is recessed in cabinet back. Refrigerant flow is controlled by a capillary tube. R-404a refrigerant. Operating temperature range: -5°F to 0°F.
- **Approvals:** UL, C-UL, ETL Sanitation listed; VF49-S is ENERGY STAR® listed**

STANDARD FEATURES

- Air-cooled condensing unit
- Automatic condensate vaporizer
- Automatic defrost
- Casters
- Capillary tube system
- Recessed pocket handle
- Door open alarm
- Door opening heaters
- Interior light
- Key locks
- Magnetic gasket
- Microprocessor with digital display
- Operating temperature range: -5°F to 0°F
- Polyurethane insulation
- R-404a refrigerant
- Stainless steel interior and exterior
- Vinyl coated shelves
- 1 Year Parts & Labor 5 Year Compressor Warranty
- UL, C-UL, ETL Sanitation & ENERGY STAR® listed**

WARRANTIES



Parts & Labor
*Optional 2nd year
can be purchased




Compressor



** C-UL is Underwriters Laboratories Safety Certification Mark which indicates that UL has tested the equipment to applicable CSA Standards.

** UL-Sanitation is Underwriters Laboratories Safety Certification Mark which indicates that UL has tested the equipment to applicable NSF Standards.

** For listings and approval reference information please consult: <http://volitionrefrigeration.com/listings-reference/>

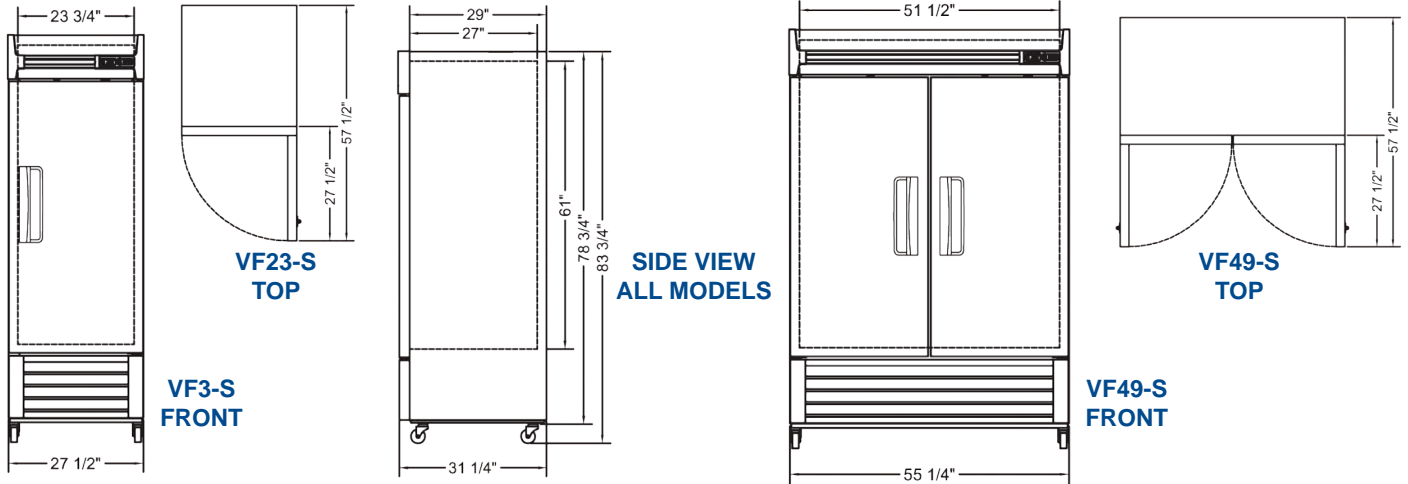

SPECIFICATIONS

OPTIONAL ACCESSORIES

Models	VF23-S	VF49-S
Crated Weight (lbs) (kg)	308 (139)	483 (217)
Crated Height (in) (cm)	84-1/4 (211)	84-1/4 (211)
Crated Width (in) (cm)	29-1/8 (73)	56-3/4 (142)
Crated Depth (in) (cm)	33-1/2 (84)	33-1/2 (84)
Interior Height (in) (cm)	61 (153)	61 (153)
Interior Width (in) (cm)	23-3/4 (59)	51-1/2 (129)
Interior Depth (in) (cm)	27 (68)	27 (68)
Overall Height (in) (cm) *	83-3/4 (209)	83-3/4 (209)
Overall Width (in) (cm)	27-1/2 (69)	55-1/4 (138)
Overall Depth (in) (cm)	33 (83)	33 (83)
Gross Cubage (CuFt) (L)	23 (651)	49 (1387)
Number of Shelves	2	4
Shelf Area (SqFt) (Sqm)	18 (1.67)	39 (3.6)
Number of Casters	4	4
Condensing Unit Size	3/5 HP	4/5 HP
Refrigerant	R-404a	R-404a
Electrical Characteristics	115/60/1	115/60/1
Cord & Plug Furnished	Yes	Yes
NEMA Plug Configuration	5-15P	5-15P
Total Amp Draw	8.5	10.5

- Additional 2nd year parts and labor warranty
- Pan Slide Rack
- Field Reversible Door Kit (LH) (1 DOOR ONLY)
- Leg kit
- Extra Shelf with clips



Specifications subject to change without notice.

* The overall heights shown in the table and drawings are with casters.

Distributed by:



Rapids Wholesale Equipment
6201 S Gateway Dr.
Marion, IA 52302