

## VBC Series Bottle Coolers



PROJECT:

ITEM NUMBER:

MODEL NUMBER:

VBC95

VBC80

### SPECIFICATIONS FOR: VBC80 and VBC95

- **Exterior Finish:** Black vinyl coated steel cabinet exterior front, sides and back with stainless steel top and sliding covers.
- **Interior Finish:** Interior galvanized walls and stainless steel floor with floor drain.
- **Insulation:** Foamed-in-place with 1-1/2" CFC free polyurethane insulation.
- **Hardware:** Standard with removable bottle opener cap catcher, integrated glass rail on rear top, easy glide sliding lids with locks. Adjustable product dividers supplied. Plastic breaker strips around door openings to limit the formation of any condensation.
- **Electrical:** 115 volt, 60 Hz, 1 phase with cord and NEMA 5-15P plug.
- **Refrigeration:** Self-contained forced air R-134a capillary tube refrigeration system. Automatic defrost and condensate evaporator requires no plumbing. Adjustable temperature control with temperature range: +34°F to +38°F.
- **Approvals:** UL, C-UL Safety and ETL Sanitation (US & Canada) \*\*

### STANDARD FEATURES

- Adjustable temperature control
- Air cooled condensing unit
- Automatic defrost and condensate evaporator
- Black vinyl coated steel exterior
- Capillary tube system
- Durable galvanized interior walls
- Removable cap catcher
- Multiple evaporator fan motors
- Stainless steel top with integrated glass rail
- Stainless steel interior floor
- Stainless steel sliding lids with locks
- Temperature range: +34°F to +38°F
- Vinyl coated product dividers
- 1 Year Parts & Labor, 5 Year Compressor Warranty
- UL, C-UL Safety and ETL Sanitation (US & Canada) \*\*

### WARRANTIES



Parts & Labor  
\*Optional 2<sup>nd</sup> year  
can be purchased





Compressor

\*\* C-UL is Underwriters Laboratories Safety Certification Mark which indicates that UL has tested the equipment to applicable CSA Standards.


\*\* UL Sanitation is Underwriters Laboratories Sanitation Mark which indicates that UL has tested the equipment to applicable NSF Standards.

\*\* For listings and approval reference information please consult: <http://volitionrefrigeration.com/listings-reference/>

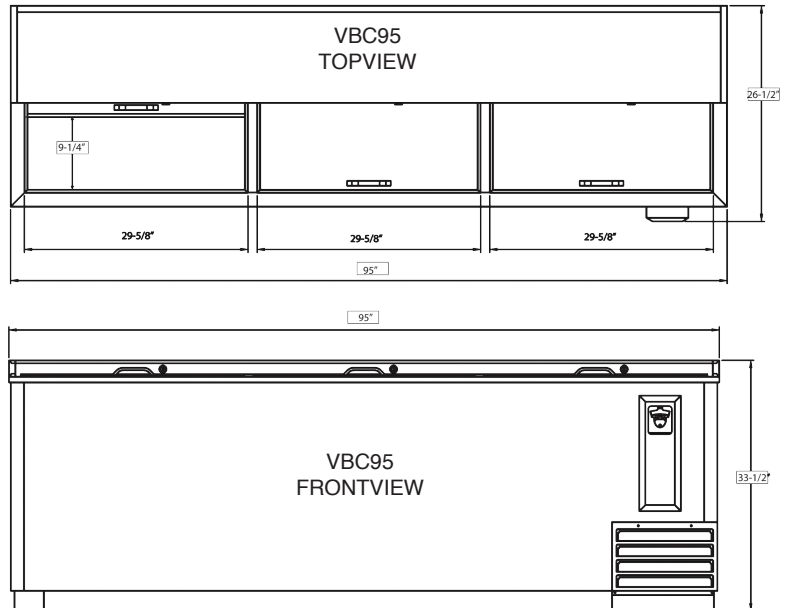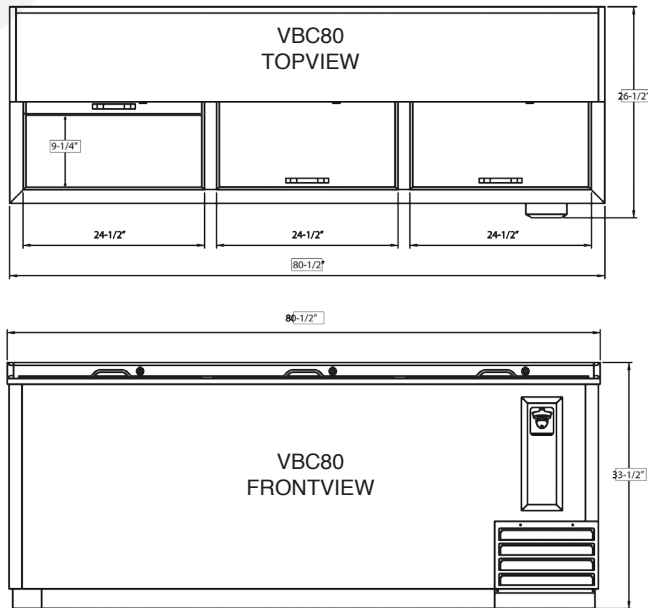

## SPECIFICATIONS

Models	VBC80	VBC95
Crated Weight (lbs) (kg)	415 (188)	430 (195)
Crated Height (in) (cm)	41 (104)	41 (104)
Crated Width (in) (cm)	83 (211)	97-1/2 (248)
Crated Depth (in) (cm)	29-1/8 (74)	29-1/8 (74)
Interior Height (in) (cm)	27-7/8 (71)	27-7/8 (71)
Interior Width (in) (cm)	76-1/2 (194)	91 (231)
Interior Depth (in) (cm)	22-3/4 (58)	22-3/4 (58)
Overall Height (in) (cm)	33-1/2 (85)	33-1/2 (85)
Overall Width (in) (cm)	80-1/2 (205)	95 (241)
Overall Depth (in) (cm)	26-1/2 (67)	26-1/2 (67)
Gross Cubage (CuFt) (L)	26 (736)	31.3 (886)
Number of Dividers	5	6
Condensing Unit Size	3/8 HP	3/8 HP
Refrigerant	R-134a	R-134a
Electrical Characteristics	115/60/1	115/60/1
Cord & Plug Furnished	Yes	Yes
NEMA Plug Configuration	5-15P	5-15P
Total Amp Draw	6.1	6.1
12 oz. Can Capacity	1575	1893
12 oz. Bottle Capacity	715	877

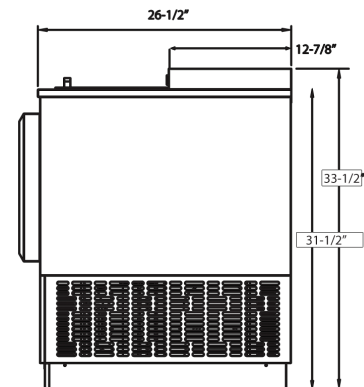

ALL  
SIDEVIEW

## OPTIONAL ACCESSORIES

- Optional Additional 2nd year parts & labor warranty
- Caster Kits

Distributed by:



Rapids Wholesale Equipment  
6201 S Gateway Dr.  
Marion, IA 52302

Specifications subject to change without notice.

\* Floor drain connection exits the rear of the cabinet condensing unit compartment.