

VUR Series Undercounter Refrigerators



VUR27



VUR48

PROJECT:

ITEM NUMBER:

MODEL NUMBER:

SPECIFICATIONS FOR: VUR27 AND VUR48

- **Finish:** Stainless steel interior and exterior.
- **Insulation:** Complete cabinet and doors are foamed-in-place with polyurethane insulation.
- **Hardware:** Recessed pocket handle(s) with one vinyl coated shelf per door; 6" diameter casters standard.
- **Electrical:** 115 volt, 60 Hz, 1 phase with cord and plug.
- **Refrigeration:** Self contained forced air refrigeration system.
The condensate is collected and automatically evaporated from an energy efficient hot gas style vaporizer.
Refrigerant flow is controlled by a capillary tube. R-134a refrigerant.
Temperature range: +34°F to +38°F.
- **Approvals:** UL, C-UL, ETL Sanitation**, ADA compliant ** EnergyStar® Listed

STANDARD FEATURES

- Air-cooled condensing unit
- Automatic condensate vaporizer
- Automatic defrost
- Casters
- Capillary tube system
- Recessed pocket handles.
- Magnetic gasket
- Self-closing doors
- Stainless steel interior and exterior
- Vinyl coated shelve(s)
- 1 Year Parts & Labor, 5 Year Compressor Warranty
- UL, C-UL, ETL Sanitation
- EnergyStar® Listed



WARRANTIES




Parts & Labor
*Optional 2nd year
can be purchased



Compressor

** C-UL is Underwriters Laboratories Safety Certification Mark which indicates that UL has tested the equipment to applicable CSA Standards.
** ETL-Sanitation is Intertek Labs Sanitation Certification Mark which indicates that ETL has tested the equipment to applicable NSF Standards.
** For listings and approval reference information please consult: <http://volitionrefrigeration.com/listings-reference/>

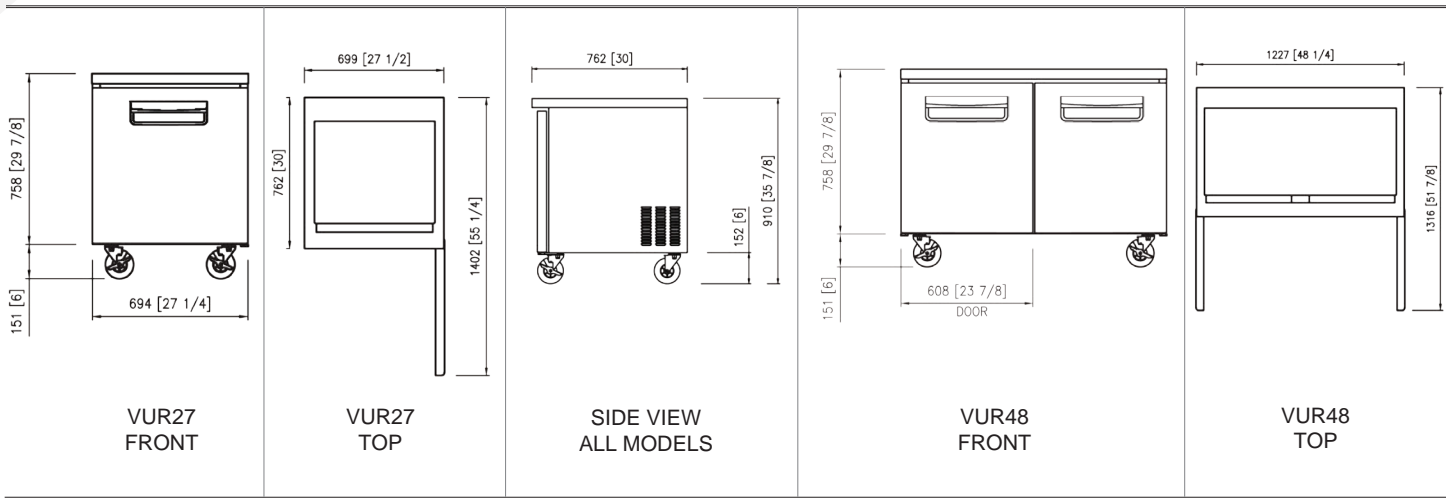

SPECIFICATIONS

OPTIONAL ACCESORIES

Models	VUR27	VUR48
Crated Weight (lbs) (kg)	199 (90)	280 (126)
Crated Height (in) (cm)	36-1/4 (91)	36-1/4 (91)
Crated Width (in) (cm)	30-1/8 (75)	51-1/8 (128)
Crated Depth (in) (cm)	33-1/2 (84)	33-1/2 (84)
Interior Height (in) (cm)	26-1/8 (65)	26-1/8 (65)
Interior Width (in) (cm)	23-3/4 (59)	44-5/8 (112)
Interior Depth (in) (cm)	20-1/4 (51)	20-1/4 (51)
Overall Height (in) (cm) *	35-7/8 (90)	35-7/8 (90)
Overall Width (in) (cm)	27-1/2 (69)	48-1/4 (121)
Overall Depth (in) (cm)	30 (75)	30 (75)
Gross Cubage (CuFt) (L)	7.0 (198)	13.0 (368)
Number of Shelves	1	2
Shelf Area (SqFt) (Sqm)	2.75 (0.26)	5.30 (0.49)
Number of Casters	4	4
Condensing Unit Size	1/5 HP	3/8 HP
Refrigerant	R-134a	R-134a
Electrical Characteristics	115/60/1	115/60/1
Cord & Plug Furnished	Yes	Yes
NEMA Plug Configuration	5-15P	5-15P
Total Amp Draw	3.2	6.0

- Backsplash Assembly
- Low profile caster kit
- Single and double overshelf assemblies
- Optional Additional 2nd year parts and labor warranty
- Additional shelves



Distributed by:



Rapids Wholesale Equipment
6201 S Gateway Dr.
Marion, IA 52302

Specifications subject to change without notice.

* The overall heights shown in the table and drawings are with casters.