

## VSP Series Sandwich Prep Refrigerators



PROJECT:

ITEM NUMBER:

MODEL NUMBER:

### SPECIFICATIONS FOR: VSP27-8, VSP48-12 and VSP60-16

- **Finish:** Stainless steel interior and exterior.
- **Insulation:** Complete cabinet and doors are foamed-in-place with polyurethane insulation Insulated pan cover
- **Hardware:** Handle with recessed pocket with one vinyl coated shelf per door, 6" diameter casters standard.
- **Electrical:** 115 volt, 60 Hz, 1 phase with cord and plug.
- **Refrigeration:** Self-contained forced air refrigeration system. The condensate is collected and automatically evaporated from an energy efficient hot gas style vaporizer.  
Refrigerant flow is controlled by a capillary tube. R-134a refrigerant.  
Temperature range: +34°F to +38°F for storage area, +33°F to +41°F for refrigerated pan well.
- **Accessories:** 1/6 size pans and 9-1/2" polyethylene cutting board included
- **Approvals:** UL, C-UL, ETL Sanitation listed \*\*, ADA compliant \*\*\*

### STANDARD FEATURES

- 1/6 size pans included  
\*Note: VSP27-8 has (6) 1/6 size pans and (2) 1/9 size pans included
- Air cooled condensing unit
- Automatic condensate vaporizer
- Automatic defrost
- Casters
- Capillary tube system
- Recessed pocket handle(s)
- Magnetic gasket
- Self-closing doors
- Stainless steel interior and exterior
- Vinyl coated shelve
- UL, C-UL, ETL Sanitation listed\*\*
- 1 Year Parts & Labor, 5 Year Compressor Warranty

### WARRANTIES



Parts & Labor  
\*Optional 2<sup>nd</sup> year  
can be purchased




Compressor

\*\* C-UL is Underwriters Laboratories Safety Certification Mark which indicates that UL has tested the equipment to applicable CSA Standards.

\*\* ETL-Sanitation is Intertek Labs Sanitation Certification Mark which indicates that ETL has tested the equipment to applicable NSF Standards.

\*\* For listings and approval reference information please consult: <http://volitionrefrigeration.com/listings-reference/>

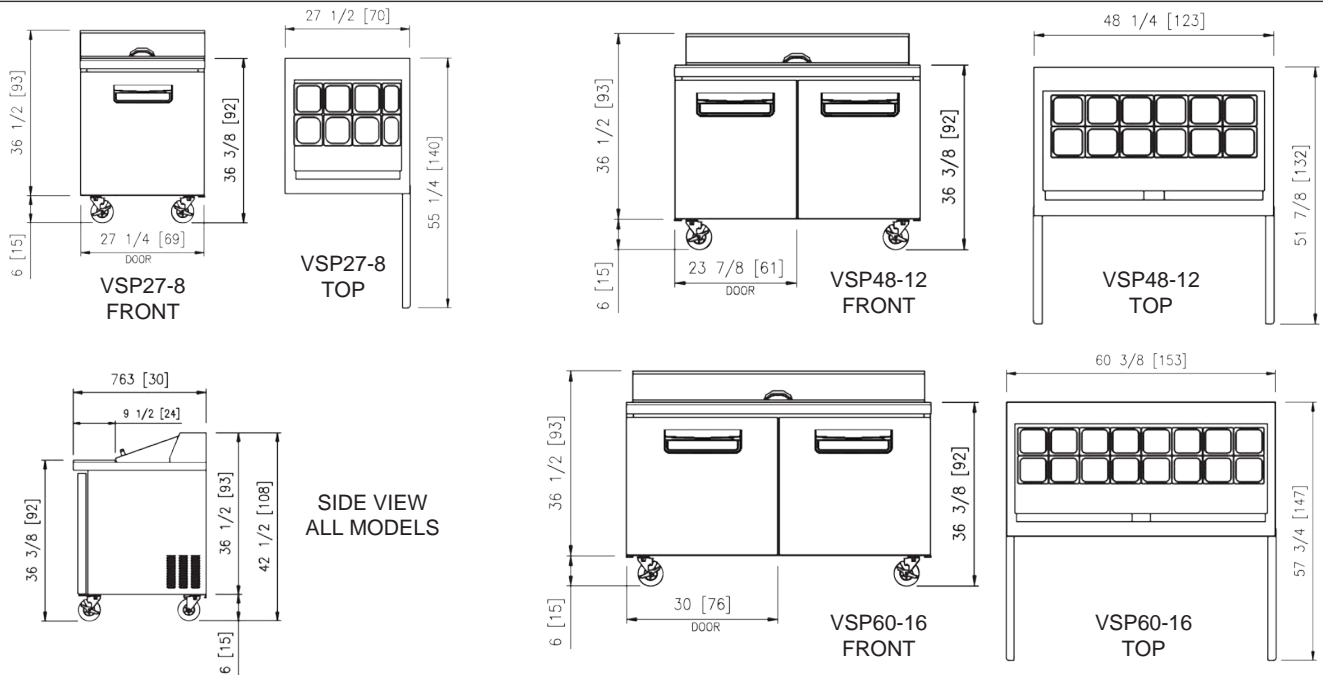

### SPECIFICATIONS

### OPTIONAL ACCESSORIES

Models	VSP27-8	VSP48-12	VSP60-16
Crated Weight (lbs) (kg)	212 (95)	304 (137)	344 (155)
Crated Height (in) (cm)	47-7/8 (107)	42-7/8 (107)	42-7/8 (107)
Crated Width (in) (cm)	30-1/8 (75)	51-1/8 (128)	63 (158)
Crated Depth (in) (cm)	33-1/2 (84)	33-1/2 (84)	33-1/2 (84)
Interior Height (in) (cm)	20 (51)	20 (51)	20 (51)
Interior Width (in) (cm)	23-3/4 (59)	44-5/8 (112)	56-3/4 (142)
Interior Depth (in) (cm)	20-1/4 (51)	20-1/4 (51)	20-1/4 (51)
Overall Height (in) (cm)	42-1/2 (106)	42-1/2 (106)	42-1/2 (106)
Overall Width (in) (cm)	27-1/2 (69)	48-1/4 (121)	60-3/8 (151)
Overall Depth (in) (cm)	30 (75)	30 (75)	30 (75)
Gross Cubage (CuFt) (L)	7 (198)	13 (368)	16 (453)
Number of 1/6 Pans	8*	12	16
Number of Shelves	1	2	2
Shelf Area (SqFt) (Sqm)	4.82 (0.45)	9.28 (0.86)	12.35 (1.15)
Number of Casters	4	4	4
Condensing Unit Size	1/5 HP	3/8 HP	3/8 HP
Refrigerant	R-134a	R-134a	R-134a
Electrical Characteristics	115/60/1	115/60/1	115/60/1
Cord and Plug Furnished	Yes	Yes	Yes
NEMA Plug Configuration	5-15P	5-15P	5-15P
Total Amp Draw	3.2	7.9	7.9

- Additional 2<sup>nd</sup> year Parts & Labor Warranty
- Low Profile Casters Kit (3"OAH)
- Single and Double Overshelf
- Extra Shelf with Clips



Distributed by:



Rapids Wholesale Equipment  
6201 S Gateway Dr.  
Marion, IA 52302

Specifications subject to change without notice.

\* VSP27-8 has (6) 1/6 pans and (2) 1/9 size pans included