



REACH-IN BOTTOM-MOUNT SERIES FREEZER

Features

- CFC free refrigerant and foam insulation
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- 3 adjustable, heavy-duty epoxy coated wire shelves per door
- Condensate heating element built into condensate pan for efficient evaporation of excess water
- Freezer door frames have integral factory installed heating element to eliminate condensation
- Easy to mount 4" casters (lockable in front) are standard with all units
- Locking doors on all units. VB27F door swing is field reversible
- Self-closing doors that remain open at 90 degrees
- Magnetic gasket can be replaced without any tools
- Exterior: 430 stainless steel
- Interior: 304 stainless steel
- Temperature: 0 to -10°F / -17 to -23°C
- Electrical: 115/60/1 with NEMA 5-15P plug
- R-290 Natural Refrigerant



Units may not ship with exact handle pictured



VB27F*



VB54F*

Specifications

DESIGNED TO OPERATE IN AMBIENT TEMPERATURES BETWEEN 40F-90F FOR OPTIMUM PERFORMANCE.


Model	Doors	Ext. Dimensions W X D X H (In)	Int.. Dimensions W X D X H (In)	Amps	H.P	Ship Weight
VB27F*	1	26.8 X 32.7 X 82.3	22.2 X 27.6 X 50.2	11	5/8	329 lbs
VB54F*	2	53.9 X 32.7 X 82.3	49.4 X 27.6 X 50.2	12	1	501 lbs



REACH-IN BOTTOM-MOUNT SERIES FREEZER

Dimensions in inches (mm)

VB27F*

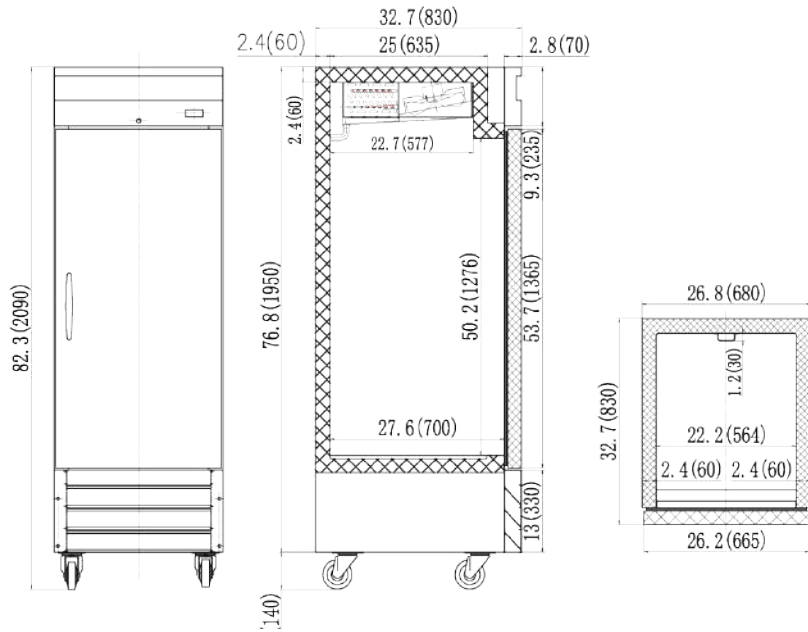

VB54F*

