

GAS CONVECTION OVEN

Features

- •3 inshot burners, 18,000 BTU each-total 54,000 BTU
- Electronic thermostat (FAST) & manual timer control
- Temperature range: 150°-500°F (66°-260°C)
- Independent doors with full view windows
- 2-speed, ¹/₂ HP fan motors (1725, 1140rpm) for even heat distribution and forced "cool down" fan mode
- Porcelain enamel oven interior for easy cleaning
- Stainless steel front, sides & top exterior
- •5 nickel plated Heavy Duty racks, 11 rack positions
- Available in Natural gas(NG) or Liquid propane(LP)
 A conversion kit is supplied with each unit








VGCO






GAS CONVECTION OVEN

Dimensions in inches (mm)

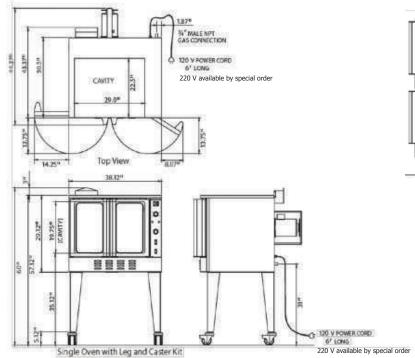

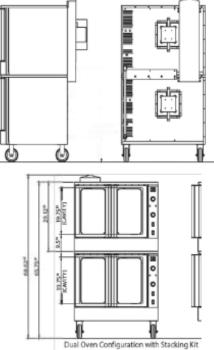

Requires two separate gas connections

Specifications

Model	Overall Dimensions	Oven Interior	Rack Clearance	Shipping Crate(s)	
VGCO	38.12"W x 44.37"D x 60"H (96.8cm x 112.7cm x 152.4cm)	29" W x 22.5" D x 19.37" H (74cm x 57cm x 50cm)	28"W x 21"D (72cm x 53.3cm)	45.3"W x 49.2" D x 37" H, 48 cu ft., 511 lbs (115cm x 125cm x 99cm, 1.35 cu m., 232kgs	
VGCO-2	38.12"W x 44.37"D x 65.62"H (96.8cm x 112.7cm x 166.7cm)	29" W x 22.5" D x 19.37" H (74cm x 57cm x 50cm)	28″W x 21″D (72cm x 53.3cm)	2 Single Oven Crates, Total, 96cu ft., 1022 lbs (2.7cu m., 464kgs.)	
GAS REQUIREMENTS			Leg or Stacking Kits	Shipping Carton	Weight
 Natural Gas or Liquid Propane (LP) Gas main supply required A conversion kit is supplied with each unit. In order to avoid any waranty issues, conversion of your unit must be completed by an authorized Ikon service agent. 3/4" NPT gas connection VGCO-2 requires two gas connections Natural gas 3.5" W.C., LP gas 10" W.C. VGCO Includes log and caster kit 			VGCO SINGLE LEG AND CASTER KIT	29.9″W x 18.1″D x 8.7″H (76cm x 46cm x 22cm)	41lb 18.5kg
			VGCO DUAL STACKING KIT	38.2"W x 11.8"D x 6.7"H (97cm x 30cm x 17cm)	35lb 16kg

VGCO Includes leg and caster kit
VGCO-2 Includes stacking kit



